

NYC Series Die-Cast Metal Manual Pull Stations



Description

These uniquely designed manual pull stations incorporate a diagonal white stripe required in many New York City fire alarm applications. They are constructed from a rugged, but lightweight, metal alloy for increased performance and product life. This series is available in single action (PULL lever) or dual action (PUSH bar and PULL lever) models. All are key resettable.

The SG-42SK-NY pull stations are provided with one normally open contact connected to a terminal strip that can accommodate both solid and stranded wire from #22 to #12 AWG. Contacts are gold plated to minimize the risk of corrosion. All models have been tested by UL and found in compliance with the pull force requirements of the Americans with Disabilities Act (ADA).

Operation

The stations are operated by pulling the handle marked "PULL" on the front of the unit as far down as it will go. At that point, the handle will lock in place and is easily visible from up to 50 feet. The activation handle is reset by opening the station with the key, placing the "PULL" handle to its normal upright position and relocking the station. On the dual action models, the "PUSH" bar moves inward allowing the "PULL" handle to be operated by a single hand. A break rod is included but is optional and not required for operation.

Mounting Configuration

Semi-Flush--All models mount on a standard single-gang back-box.

Surface Mount Interior--Use SigCom SGB-32S

Surface Mount Exterior--Use SigCom SG-WP

- **Single or Dual Action**
- **Key Reset**
- **Screw Terminal Connections**
- **DC and AC Voltage Contact Ratings**
- **Gold Plated Alarm Contacts**
- **Surface or Weatherproof Back-box**



Specifications

Listings:	UL, ULC, FM, MEA
Temperature:	-40°F to 150°F, 90% relative humidity @ 100°F
Switch Rating:	5 Amps @ 125 VAC, 2 Amps @ 240 VAC
Pull Station Weight:	1.2 lbs; 0.55 kg
Pull Station Dimensions:	4.25"h x 3.25"w x 1.1"d; 12.1 x 8.3 x 2.8 cm
Surface-Mount Backbox Dimensions:	4.25"h x 3.25"w x 2.25"d (outside); 12.1 x 8.3 x 5.7 cm 2.125"d (inside); 5.4 cm
Color:	Red, with raised white letters with white stripe diagonally on face of station; white "PULL" bar and white "PUSH" bar (Dual Action) with raised red letters

Ordering Information

SG-42SK1-NY Dual Action Pull Station, NYC Stripe, SPST
SG-42SK2-NY Single Action Pull Station, NYC Stripe, SPST

Accessories

SGB-32S	Interior, red, surface mount, sheet metal backbox with two 1/2" knockouts
SG-WP	Weatherproof, red, surface mount, die-cast metal backbox with one tapped hole for 3/4" NPT fitting
SG-GR01	12 pack of scored, plastic (acrylic) break-rods for spares or replacement (break rod is optional and not required for operation)


Pull Station Cover



SENTRYTM

Description
Backplate Kit
Extender Kit
Weatherproof Kit
Front Cover Kit
Alarm Module Kit

Model
ST-BKP01
ST-XTR01
ST-WPK01
ST-FRC01
ST-ALM01

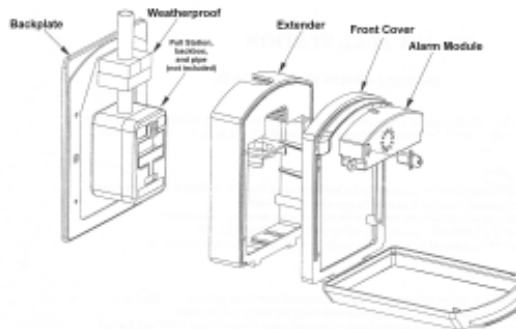

4 Wheeling Avenue • Woburn MA 01801 USA
Phone 781-933-0998 • Fax 781-933-5019
Email sales@sigcom.com • www.sigcom.com